






| Complete range of snowplows | For tractors and loaders | | | | | | | For minitractors | For pick-up trucks | | |
|---|--|--------|-------------|--------|------------|--------|--------|------------------|--------------------|-------------|-------------|
| | VP-2,8 | VP-4.0 | VP-3.7 city | VP-3.7 | VP-3,2city | VP-3.2 | VP-2,8 | DP-2,4 | VP-2,4 | DP-2,3 | VP-2,3 |
| Model | 2805 | 4000 | 3700 | 3700 | 3200 | 3200 | 2805 | 2420 | 2410 | 2300 | 2310 |
| Max. width (mm) | 2325 | 3295 | 3050 | 3050 | 2650 | 2650 | 2325 | 2000 | 1995 | 2010 | 2015 |
| Min. width (mm) | 622 | 1280 | 1195 | 1240 | 1045 | 1090 | 622 | 190-270 | 278 | 149* | 149* |
| Weight with standard equipment (kg) | 940 | 1290 | 1030 | 1260 | 1030 | 1170 | 940 | 720 | 720 | 570 | 570 |
| Moldboards height with blades (mm) | 90 | 90 | 90 | 90 | 90 | 90 | 90 | 90 | 90 | 90/-20 | 90/-20 |
| Cutting angle (in relation to ground) (°) | 4 x 692 | 4x991 | 4x915 | 4x915 | 4x792 | 4x792 | 4x692 | 4x586 | 4x586 | 4x570 | 4x570 |
| Number of segments (pcs x mm) | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 30 | 30 |
| Max turning angle (°) | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2+1 | 2+1 |
| Cylinders (pcs) | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Spring mechanism (sections) | S | S | S | S | S | S | S | S | S | S | S |
| Adapter frame | S | S | S | S | S | S | S | S | S | S | S |
| 1/2" Quick hydraulic couplings | S | S | S | S | S | S | S | S | S | S | S |
| Safety markings | E | S | S | S | S | S | S | S | S | S | S |
| Parallelogram | E | E | E | E | E | E | E | S | E | E (Plastic) | E (Plastic) |
| Rubber blades | S | S | S | S | S | S | S | E | S | S | S |
| Hardox steel blades | S | S | S | S | S | S | S | S | S | S | S |
| Skid shoes with height adjusting | E | E | E | E | E | E | E | E | E | E | E |
| Support wheels | S | S | S | S | S | S | S | S | S | S | S |
| Hydraulic safety valve of the pivot cylinder with hydraulic accumulator | E | S | S | S | S | S | S | E | E | S | S |
| Electrical hydraulic distributor with safety valves | S | S | S | S | S | S | S | S | S | remote | remote |
| Switch for hydraulic distribution in the cabin | E | E | E | E | E | E | E | E | E | S | S |
| Snow overshoot protection | E | E | E | E | E | E | E | - | S | - | - |
| Overload valve set with hydraulic accumulator | S | S | S | S | S | S | S | S | S | S | S |
| LED marker lights | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Warranty (y) | S-standard E-extra *-without hooking frame | | | | | | | | | | |

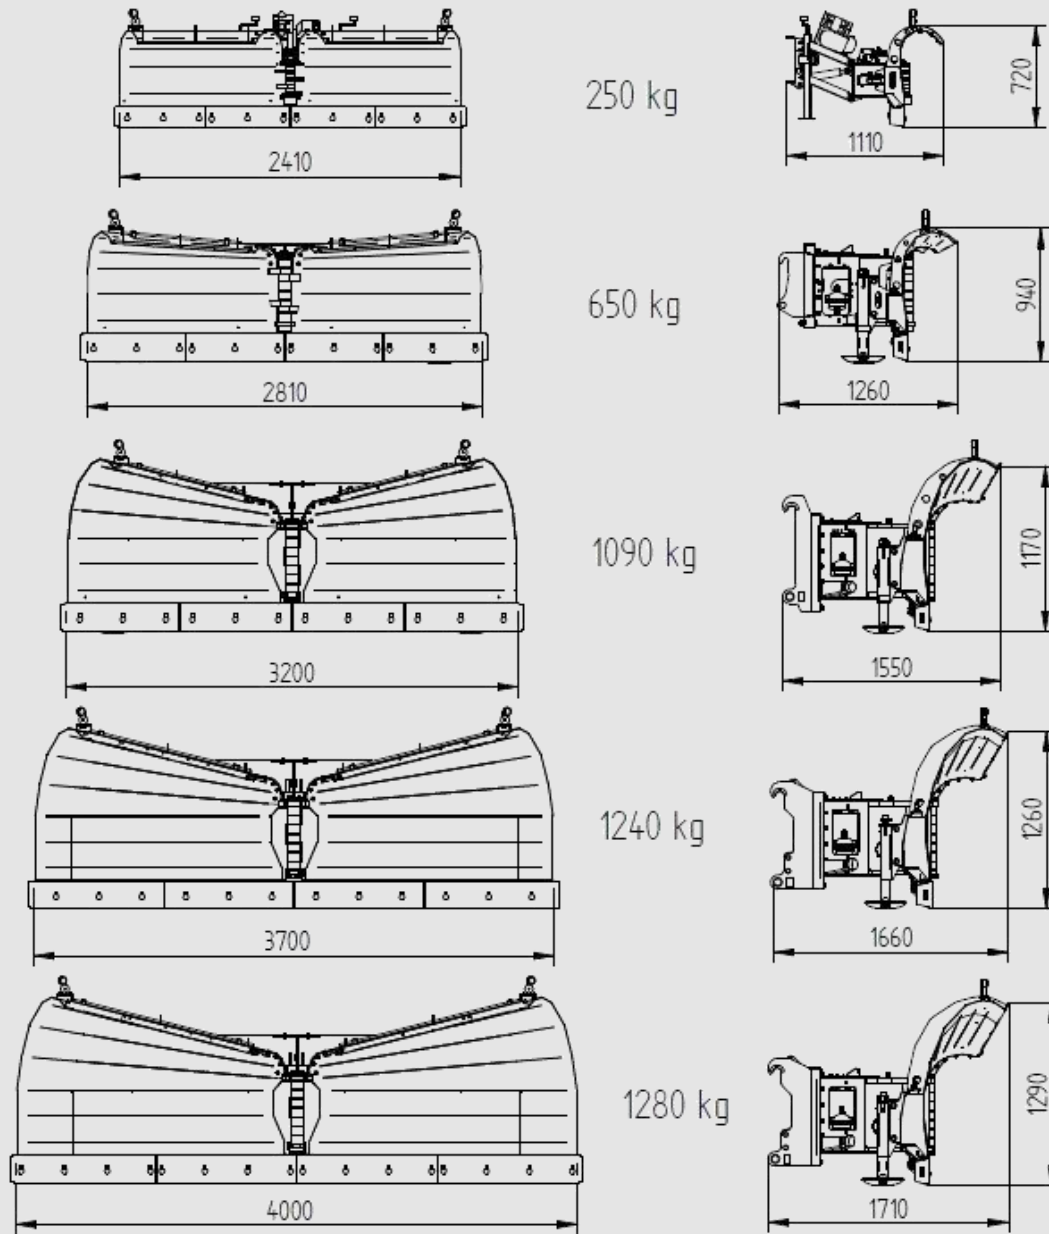


estre

V-plows range for tractors and loaders




"Cityplow"
1045 kg

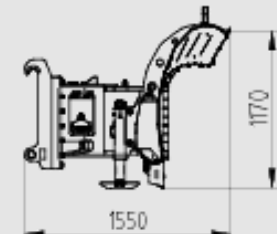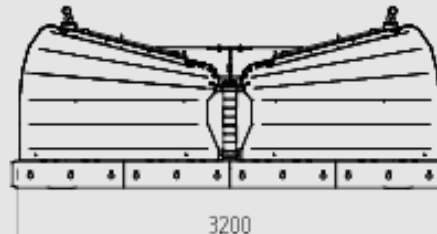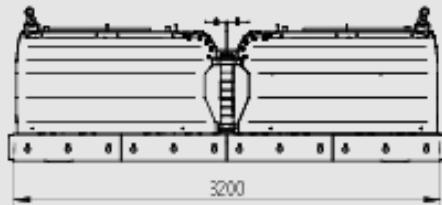

V-plow
3,2 m
1090 kg

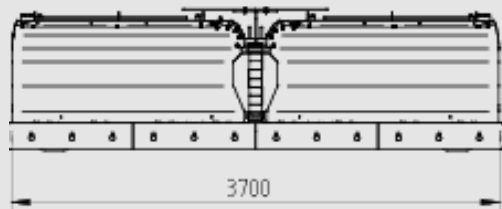

"Cityplow"
1195 kg

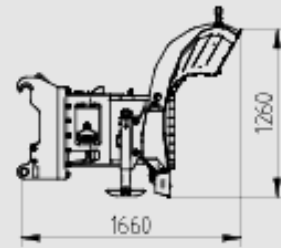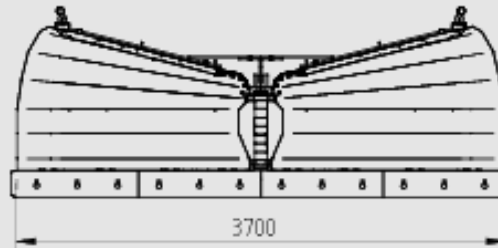

V-plow
3,7 m
1240 kg

estre

Cityplow vs. traditional plow